

LED DOWN LIGHT



Features

- Lightweight design
- Double-spring clips and detachable SMPS for easy installation
- Long life up to 40,000 hours

Applications

- Commercial lighting
- Offices, Educational facilities

Replacements

- CFL 13W x 1 ~ CFL 26W x 2
- POSCO LED 10/ 15/ 20W
- HQI 70 ~ 150W • POSCO LED 45W



Save up to
62%




LED DOWN LIGHT

Trusted Professional in LED Lighting


6 inch

10/ 15/ 20W Dimensional Drawing (mm)

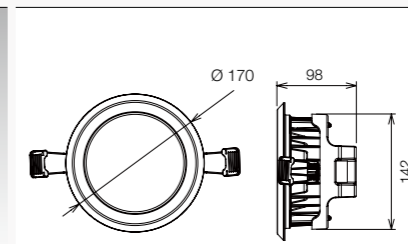

Light Distribution Curve

20W



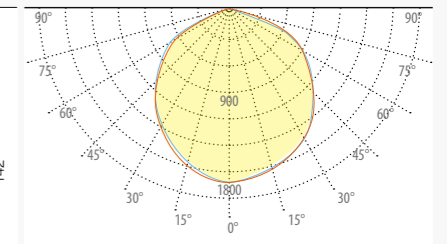


Illuminance Chart

10W




15W

20W

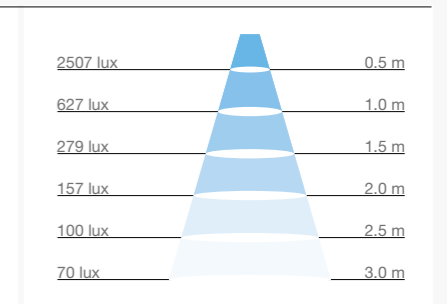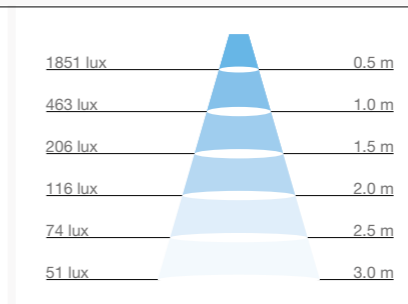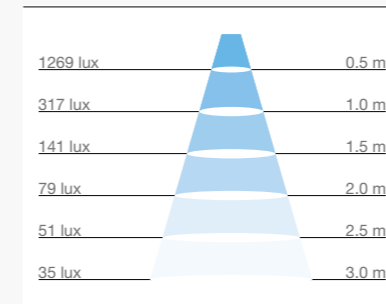

8 inch

45W

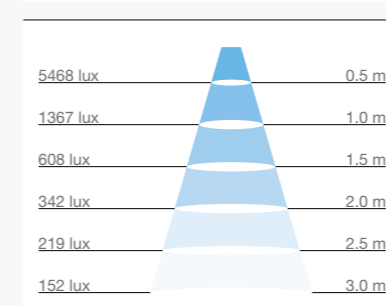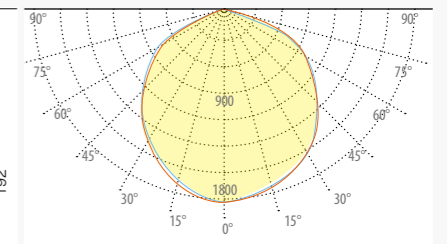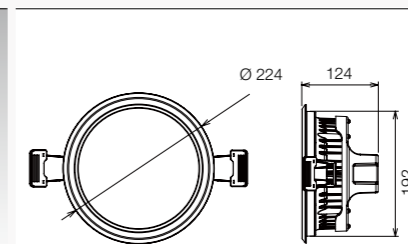

Specifications

Product Code	Type	Watts (W)	Vin (V AC)	CCT (K)	Lumens (lm)	CRI (Ra)	Weight (g)	Dimensions ((D)x(H))mm
PDL61103N3A10	6 Inch	10	100 ~ 240	5,000 (3,000/ 6,500)	750 (700/ 750)	80 ↑	865	Ø 170 x 98
PDL61153N3A10	6 Inch	15	100 ~ 240	5,000 (3,000/ 6,500)	1,125 (1,050/ 1,125)	80 ↑	865	Ø 170 x 98
PDL61203N3A10	6 Inch	20	100 ~ 240	5,000 (3,000/ 6,500)	1,500 (1,400/ 1,500)	80 ↑	865	Ø 170 x 98
PDL81453N3A10	8 Inch	45	100 ~ 240	5,000 (3,000/ 6,500)	3,225 (3,010/ 3,225)	80 ↑	1,750	Ø 224 x 124