

LED FLOOD LIGHT



Features

- Modular design
- Various beam angles (15/ 30/ 60°)
- IP66 rated for protection against dust and moisture, ideal for outdoor environment
- Internal SMPS
- Long life up to 40,000 hours

Applications

- Landscape lighting, Warehouses, Factories, Gymnasiums

Replacements

- HID 250W
- POSCO LED 120W




Save up to
52%




LED FLOOD LIGHT

Trusted Professional in LED Lighting

Dimensional Drawing (mm)

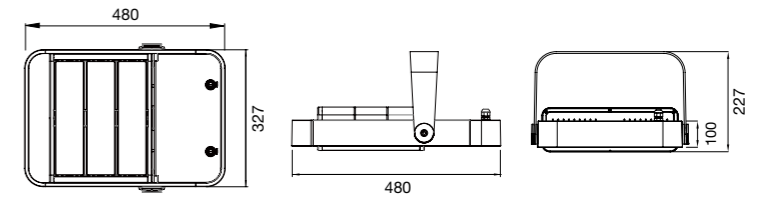

Light Distribution Curve

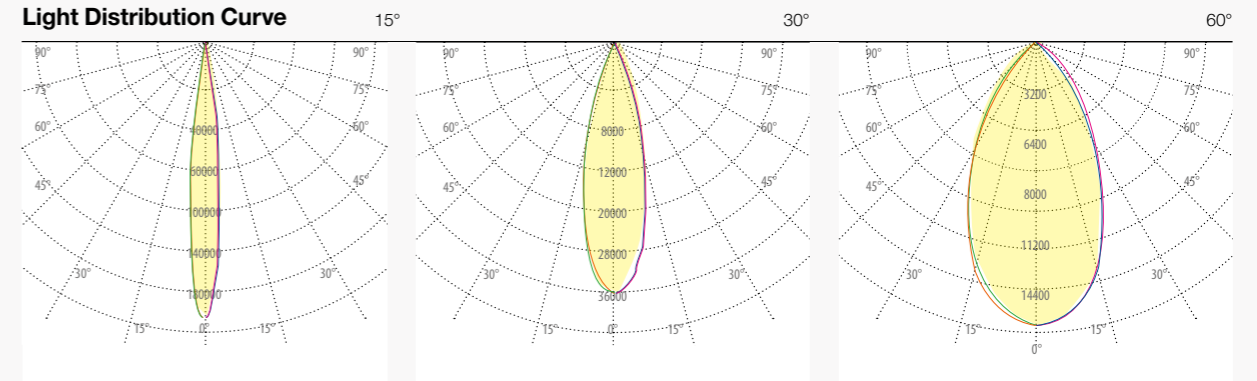

Illuminance Chart

Beam Angle	2.0 m	4.0 m	6.0 m	8.0 m	10.0 m	12.0 m	14.0 m	16.0 m
15°	48892 lux	12223 lux	5432 lux	3056 lux	1956 lux	1358 lux	998 lux	764 lux
30°	9098 lux	2274 lux	1011 lux	569 lux	364 lux	253 lux	186 lux	142 lux
60°	3911 lux	978 lux	435 lux	244 lux	156 lux	109 lux	80 lux	61 lux

Specifications

Product Code	Watts (W)	Vin (V AC)	CCT (K)	Lumens (lm)	Beam Angles (deg.)	CRI (Ra)	Weight (kg)	Dimensions (L)x(W)x(H)mm
PFBRA24W2100	120	90 ~ 264	3,000	7,350	15 (30/ 60)	80 ↑	10	480 x 327 x 100
PFBRA24C1100	120	90 ~ 264	5,700	9,000	15 (30/ 60)	70 ↑	10	480 x 327 x 100